
# ELASTOMERIC PAINT EXTERIOR COLORS



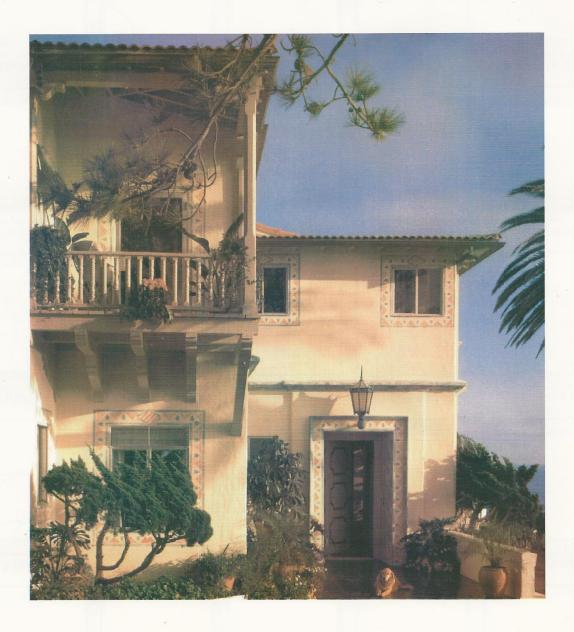

Sun Tech Coating Mfg.

6027 N. 57th Dr. Glendale, AZ 85301 "Manufacturers of Quality Elastomeric Products"

(623) 842-0690 Fax (623) 842-1044



## ITLY FROM ACTUAL PAINT COLOR CANDLE WAX **BALTIC WINGS BISON BEIGE** WHITE TRADE PIECES OF GOLD TRAVERTINE EARTH'S EDGE MESA TAN SCOTTSDALE BROWN COPPER DUST TUMBLE WEED BONE CHINA BIRCHWOOD ROADRUNNER STONISH BEIGE CANDLE SONORA GRAY **AUTUMN CLIFF** GRANITE **COYOTE PAW** SANDAL THISTLES HEDGEHOG ADOBE SOUTH SILVER TAUPE ors Available

### PRODUCT INFORMATION - SUNLASTIC A.C.P.

**DESCRIPTION:** Sunlastic is a 100% acrylic elastomeric, wall coating for exterior masonry. Sunlastic has exceptional flexibility and provides superior protection against wind-driven rain and moisture by bridging hairline cracks and other small imperfections that develop after application. **Sunlastic** accommodates normal expansion and contraction by providing outstanding elastic recovery and resilience, even under conditions of extreme cold or heat. **Sunlastic** has outstanding resistance to ultraviolet light and dirt pick up, and can be touched-up easily.

#### **SPECIFICATIONS**

SOLVENT TYPE **RESIN TYPE** Waterborne Styrene acrylic **FINISH** Flat ELONGATION AT 77°F (25° C) VISCOSITY AT 77°F (25° C) 125-130 Ku VOC CONTENT 110g/L (as supplied) SOLIDS BY VOLUME SOLIDS BY WEIGHT WEIGHT PER GALLON 11.50 lbs COMPOSITION BY WEIGHT (APPROX.) Pigment 43% Vehicle 57.0% . . . . . 14.0 \*Prime pigments . \*Prime pigments include titanium dioxide (TiO<sub>2</sub>), plus all other pigments directly adding to the hiding power of this paint.

Wet: 17.0 mils Dry: 8.0 mils (See Special Instructions)
PRACTICAL COVERAGE PER COAT AT RECOMMENDED DRY

FILM THICKNESS
40-100 sq. ft. per gallon, depending on surface conditions and application techniques.

AVERAGE DRY TIME AT 77°F (25°C)

To touch: 1-2 hours
Tack-free: 2-4 hours
Recoat: 24 hours
To handle: 48 hours

APPLICATION EQUIPMENT

Brush, roller, airless spray (See Special Instructions)

RECOMMENDED FILM THICKNESS PER COAT

PACKAGING

Five-gallon containers.

#### **MATERIAL SAFETY DATA SHEET**

Available on request

#### SURFACE PREPARATION

All surfaces must be cured, clean, dry and free from dirt, dust, rust, stains, grease, oil, mildew, wax, efflorescence and other contaminants. Remove all loose, peeling, or chalky paint by sanding, scraping, wire brushing, sandblasting, high-pressure washing or other appropriate methods. Patch hairline cracks with an S.J.S. patching or caulking material. Structural cracks and other imperfections not caused by normal ground movement and settling must be repaired before proceeding. Repaired surfaces should match the surrounding surface texture. If efflorescence exists, remove all noticeable deposits and prime the entire surface with Sure Seal Sealer/Bonder.

#### SPECIAL INSTRUCTIONS

- Sure Seal Sealer/Bonder should be applied prior to any paint application.
- Airless spray application is recommended in order to achieve the optimum film thickness. An airless spray unit with a minimum output of 2 gallons per minute is recommended.
- Approved application of Sunlastic must be "pinhole free", and have a
  dry film thickness of 15-20 mils. Surface features mandate the method of
  application and number of coats needed to achieve proper thickness.
- $\bullet$  Do not apply when the air or surface temperature is below 50°F and do not store in temperatures near freezing (32°F).
- Allow stucco and smooth-troweled plaster to cure at least 3 days before sealing.
- Allow tilt-up concrete to cure at least 7 days before sealing with Sure Seal Sealer/Bonder.

#### THINNING RECOMMENDATIONS

Do not thin

CLEANUP Water

#### Light Reflectance Values\*

	Name	LRV	Name	LRV	Name	LRV
	Adobe South	53	Faded Rose	32	Potato Skin	27
	Alliant Gray	65	Gateway Gray	35	Roadrunner	39
	Ambient Sound	62	Granite	58	San - Tan	68
	Amber Waves	49	Hedgehog	38	Sandal	41
	Autumn Cliff	21	Hint of Cream	74	Scottsdale Brown	33
	Baja White	81	Homestead	47	Sea Lion	17
	Baltic Wings	49	Humble Brown	18	Silver Taupe	59
	Bison Beige	25	Ironwood	64	Sonora Gray	39
	Bone China	80	Light Rose	52	Still Creek	42
	Birchwood	49	Log Cabin	40	Stonish Beige	45
	Candle	28	Mesa Tan	25	Summer In Province	49
4	Candle Wax	84	Mushroom	50	Thistles	19
	China Peach	79	Navajo White	73	Tumble Weed	28
	Chuckwagon	46	Norwegian Wood	55	Travertine	56
	Copper Dust	49	Palacio	67	Western Beige	71
	Coyote Paw	30	Picnic Basket	48	White Trade	60
	Earth's Edge	29	Pieces of Gold	18		